


MVS-369 BS5152 SL GLOBE VALVE

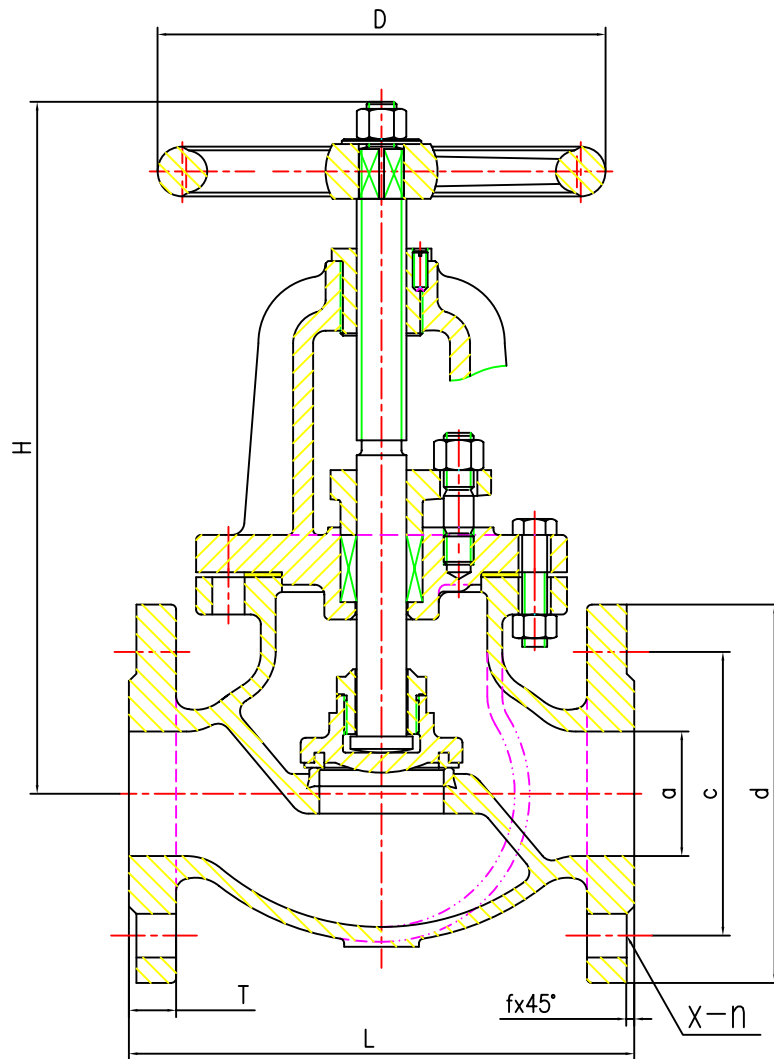

NO	Part	Grade	
1	Body	Cast Iron	BS1452 220
2	Disc	Cast Iron	BS1452 220
3	Bonnet	Cast Iron	BS1452 220
4	Stem	Stainless Steel	
5	Stem nut	Brass	
6	Cover	Cast Iron	BS1452 220
7	Handwheel	Cast Iron	BS1452 220
8	Seat Ring	Brass	

Measurement (BS4504-PN16)

DN	a	c	d	T	f	L	x-n	D	H	Wt(kg)
50	50	125	165	20	3	203	4- ϕ 19	180	280	25
65	65	145	185	20	3	216	4- ϕ 19	180	300	28
80	80	160	200	22	3	241	8- ϕ 19	200	320	33
100	100	180	220	24	3	292	8- ϕ 19	225	350	44
125	125	210	250	26	3	330	8- ϕ 19	280	390	62
150	150	240	285	26	3	356	8- ϕ 23	315	430	80
200	200	295	340	30	3	495	12- ϕ 23	355	510	148
250	250	355	405	32	3	622	12- ϕ 28	400	590	235
300	300	410	460	32	4	698	12- ϕ 28	450	630	328

Pressure / Temperature Ratings

Temperature (C)	-10 to 100	120	140	150	160	180	200	220
Pressure (Bar)	16	16	14.9	14.4	13.7	13.4	12.8	12.1

Mechtech Valve Services,
The Stenders, Mitcheldean,
Glos. GL17 0ZE
Tel: 01594 541717 Fax: 01594 541716

Mechtech Valve Services,
33 Pennycress, Locks Heath,
Southampton. Hants. SO31 6SY
Tel: 01489 609609 Fax: 01489 609610

www.mechtechvalveservices.com

MVS-369 Datasheet

MVS-369-DS Rev 001
21-June-06

Copyright 2006